

# Remotus

Robust radio remote control for safety critical mobile applications




NAME: Remotus T-Rx Era 8B.  
SPECIALITY: Radio remote control  
for suction vehicle.  
READY FOR MISSION: 2015



NAME: Remotus T-Rx Era 100.  
SPECIALITY: Radio remote control  
for hydraulic crane.  
READY FOR MISSION: 2016





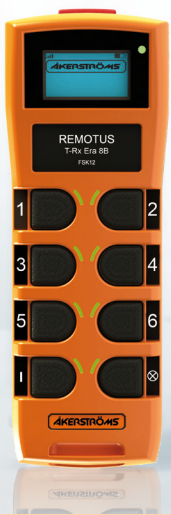

# Content

**INTRODUCTION** ..... 4

**REMOTUS T-RX** ..... 6

TRANSMITTERS

CONTROL DEVICES

RECEIVERS

**CARRYING DEVICES  
& ACCESSORIES** ..... 18





SWEDEN  
**HAMMAR**  
TEL: +46 33 290 000  
WWW.HAMMAR-SE.COM

HAMC U3 00 0 99



08704114522

POLAROID®

NAME: Åkerströms Björbo AB, Sweden.  
FOUNDED: 1918.  
Åkerströms develops robust radio remote control products for demanding environments.

**HAMMAR**

WARNING

**HAMMAR**

**HAMMAR**  
SWEDEN | +46-33 290 000

## WELCOME TO THE REAL WORLD.

Our products are right at home in extreme environments. When other products give up, ours just keep on going without complaint. Rugged, reliable remote control for industrial and mobile applications, designed for constant use. Whenever. Wherever. In the real world.

Today we are an international company that develops, manufactures, markets, and services robust wireless products for demanding industrial environments and mobile applications. Our entire range is distinguished by excellent ergonomics and design. We are scattered far and wide geographically, but we value personal contact with our customers above all. This brochure contains information on our radio remote control for safety-critical mobile applications: **Remotus**



**Remotus T-Rx** is our robust remote-control product line for mobile applications such as side loaders, suction vehicles, tow trucks, concrete pumps, concrete trucks and various different machines. The products within the T-Rx line provides the necessary safety, and reliability required for wireless control in challenging industrial environments.

The Remotus T-Rx line includes a complete receiver and transmitter line and comes in different standard and customized models suited for different usage areas.

### Remotus T-Rx Era

**Remotus T-Rx Era** is the name of the latest member of the Remotus family. The T-Rx Era 100 waist transmitter has a modern, robust design. It has rubberized handles for a good grip and stands firmly on its protective metal feet when not in use. The T-Rx Era handheld transmitters have a modern, ergonomic design, clear display, and LEDs near each button that indicate the selected function. The T-Rx Era models are lightweight and easy to carry.

### Dual CPUs for superior safety

The T-Rx Era 100 has dual CPUs, which means superior safety, even with movements/functions. It has an active stop function, which means the receiver will stop in less than 100 ms. The T-Rx Era 100 has a built-in tilt function, which means that it stops if you fall. T-Rx uses the frequency bands 433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz and 2,4 GHz. The radio module 2.4 GHz can be used worldwide and has a range of about 200 m in a clear view. If necessary, you can adjust the range by lowering the output.

### Distance restriction function

The T-Rx systems can be programmed with a distance restriction function for operating the object within a predefined distance.

### Configurable display with alarm function

T-Rx Era 100 has a large, clear display, readable in bright sunlight. It also has a vibrator and buzzer, which can be individually configured to different alarm events via the display menu. The display's backlighting can also shift to red with different alarms that can be chosen from the menu.

### High IP rating and unique battery solution

The T-Rx Era 100 is of protection class IP65-67. It has a unique battery solution where the battery is well protected from water and dust in a replaceable module whose opening is located directly below the transmitter. The transmitter can be placed in deep water without affecting the battery.

### Easily configured and functional

Personal settings or appropriate operating characteristics such as initial and maximum speed or sensitivity in the control lever can easily be adjusted and set with a software program running on an ordinary PC.

The safety stop function is approved according to **PL d, Cat 3, EN ISO 13849-1**.



---

**REMOTUS T-RX**

Remotus T-Rx is our robust remote-control product line for mobile applications.

# REMOTUS

## T-Rx — Waist transmitters

Remotus T-Rx waist transmitter line is used for everything from standard solutions to highly sophisticated machine control. The transmitters are available in three models—depending on required functions and environments in which they'll be used. Their features are fully customizable to customer requirements. They can be equipped with indicators and display for displaying different types of information from the machine via two-way communication. The transmitters are adapted for tolerating tough conditions, such as drastic temperature differences, dust, vibrations, oil, and dampness.

### REMOTUS T-Rx Era 100

**No. of functions:**

Up to six movements, 2-position, 4-position or stepless joystick (total max two joysticks)  
alt. six paddles

**Type of transmission:**

FM FSK/FM GMSK

**Transmission speed:**

4,800-19,200 baud depending on choice of radio

**Operating temperature range:**

-25 to +55°C

**Radio frequencies:**

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2,4 GHz

**Output power:**

Varies depending on application and licensing limitations. Usually 10 to 400 mW.

**Range:**

Up to 1000 m

**Antenna:**

Internal

**Battery:**

3.7 V/1.9 Ah

**Operating time:**

ca 14 hours

**Protection class:**

IP65-67

**Dimensions:**

260 x 165 x 150 mm

**Weight:**

1.3 kg

**Display type:**

Graphic LCD, 128x64 pixels





## REMOTUS T-Rx 300

### No. of functions:

Up to six movements, 2-position, 4-position or stepless joystick (total max three joysticks) alt. six paddles

### Type of transmission:

FM FSK

### Transmission speed:

Standard 4 800 baud

### Operating temperature range:

-25°C to +55°C

### Radio frequency:

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

### Output power:

Varies depending on application and licensing limitations; Normally 10 to 400 mW

### Range:

Up to 1000 m

### Antenna:

Internal

### Battery:

6 V / 2.4 Ah

### Size:

250 x 175 x 160 mm

### Weight:

1.2 kg

### Display type:

LCD, 1 row 8 characters, 1-3 rows 16 characters/row, 8 LEDs



## REMOTUS T-Rx 500

### No. of functions:

Up to eight movements, 2-position, 4-position or stepless joystick (total max four joysticks) alt. eight paddles

### Type of transmission:

FM FSK

### Transmission speed:

Standard 4 800 baud

### Operating temperature range:

-25°C to +55°C

### Radio frequency:

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

### Output power:

Varies depending on application and licensing limitations; Normally 10 to 400 mW

### Range:

Up to 1000 m

### Antenna:

Internal

### Battery:

6 V / 2.4 Ah

### Size:

340 x 175 x 160 mm

### Weight:

2.5 kg

### Display type:

LCD, 1 row 8 characters, 1-3 rows 16 characters/row, 8 LEDs



# REMOTUS

## T-Rx Era — Hand held transmitters

T-Rx Era handheld transmitters have a modern, robust design. The transmitters weigh only 265 grams and fit easily in your hand, and are IP67 classified, which means they are completely dust and water-proof. They have large, easy-to-read two-stage buttons that enable double functions on each pushbutton. Era 8B is available incl or excl LCD. A separate LED indicates storage battery status and operation and all models except Era 8B (excl LCD) have LEDs at each button that indicate the selected function. The output of the transmitters is adaptive, i.e. if the signal strength is strong, then both transmitter and receiver “downshift” to a lower output to disturb others as little as possible.

### REMOTUS T-Rx Era 8B

**No. of buttons:**  
8 two-stage buttons

**Type of transmission:**  
FM GMSK

**Transmission speed:**  
9,600 baud

**Operating temperature range:**  
-25 to +55°C

**Radio frequencies:**  
433-434 MHz, 863-870 MHz

**Output power:**  
10 mW (433-434 MHz)  
5 mW (863-870 MHz)

**Antenna:**  
Internal

**Battery:**  
3.7 V/1.9 Ah

**Operating time:**  
40 hours

**Protection class:**  
IP67

**Dimensions:**  
183 x 67 x 45 mm

**Weight:**  
265 g

**Display type:**  
Graphic, 128x64 pixels. Up to four numerical values with unit can be displayed simultaneously. The values can be displayed numerically or as bars.



### REMOTUS T-Rx Era 8B (excl LCD)

**No. of buttons:**  
8 two-stage buttons

**Type of transmission:**  
FM GMSK

**Transmission speed:**  
9,600 baud

**Operating temperature range:**  
-25 to +55°C

**Radio frequencies:**  
433-434 MHz

**Output power:**  
10 mW

**Antenna:**  
Internal

**Battery:**  
3.7 V/1.9 Ah

**Operating time:**  
40 hours

**Protection class:**  
IP67

**Dimensions:**  
183 x 67 x 45 mm

**Weight:**  
265 g



## REMOTUS T-Rx Era 6B

**No. of buttons:**  
6 two-stage buttons

**Type of transmission:**  
FM GMSK

**Transmission speed:**  
9,600 baud

**Operating temperature range:**  
-25 to +55°C

**Radio frequencies:**  
433-434 MHz

**Output power:**  
10 mW

**Antenna:**  
Internal

**Battery:**  
3.7 V/1.9 Ah

**Operating time:**  
40 hours

**Protection class:**  
IP67

**Dimensions:**  
183 x 67 x 45 mm

**Weight:**  
265 g

**Display type:**  
Graphic, 128x64 pixels. Up to four numerical values with unit can be displayed simultaneously. The values can be displayed numerically or as bars.



## REMOTUS T-Rx Era 4B

**No. of buttons:**  
4 two-stage buttons

**Type of transmission:**  
FM GMSK

**Transmission speed:**  
9,600 baud

**Operating temperature range:**  
-25 to +55°C

**Radio frequencies:**  
433-434 MHz

**Output power:**  
10 mW

**Antenna:**  
Internal

**Battery:**  
3.7 V/1.9 Ah

**Operating time:**  
40 hours

**Protection class:**  
IP67

**Dimensions:**  
183 x 67 x 45 mm

**Weight:**  
265 g

**Display type:**  
Graphic, 128x64 pixels. Up to four numerical values with unit can be displayed simultaneously. The values can be displayed numerically or as bars.



# REMOTUS

## T-Rx — Hand held transmitters

The T-Rx hand held transmitters are available in two robust models; T-Rx 12B and T-Rx 28J B. Both are available with or without graphic display. Remotus T-Rx 28J B has eight two-stage buttons and two joysticks. The transmitter is easily maneuvered with one hand, making it easier to use in situations that might otherwise require the functions of a traditional waist style transmitter. The transmitter can control 4 analog and 8 digital functions in 2 steps. You can also extend the functions with the help of a selection button. T-Rx 12B has 12, two-stage buttons that enable double function for each button. LEDs on each button indicate selected function and a separate LED indicates storage battery status and operation.

### REMOTUS T-Rx 12B

**No. of buttons:**  
12 two-stage buttons

**Type of transmission:**  
FM FSK

**Operating temperature range:**  
-25°C to +55°C

**Radio frequency:**  
433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

**Output power:**  
10 to 400 mW

**Antenna:**  
Internal

**Battery:**  
3.7 V / 1.8 Ah

**Protection class:**  
IP65

**Size:**  
243 x 77 x 41 mm

**Weight:**  
490 g

**Display type:**  
Graphic, 102\*64 pixles.  
Up to 4 values with unit can be displayed simultaneously, such as numerical or bar.



### REMOTUS T-Rx 28J B

**Antal knappar:**  
8 two-stage buttons and 2 joysticks

**Type of transmission:**  
FM FSK

**Operating temperature range:**  
-25°C to +55°C

**Radio frequency:**  
433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

**Output power:**  
10 to 400 mW

**Antenna:**  
Internal

**Battery:**  
3.7 V / 1.8 Ah

**Protection class:**  
IP65

**Size:**  
243 x 77 x 41 mm

**Weight:**  
490 g

**Display type:**  
Graphic, 102\*64 pixles.  
Up to 4 values with unit can be displayed simultaneously, such as numerical or bar.





# REMOTUS

## T-Rx — Control devices

### Rotary switches



#### ROTARY SWITCH

4-POS Art. No. 830385-000  
 8-POS Art. No. 903359-000  
 10-POS Art. No. 903875-000  
 12-POS Art. No. 946332-000  
 16-POS Art. No. 946333-000



#### POTENTIOMETER

1kΩ Art. No. 946209-000

### Pushbuttons



#### PUSHBUTTON 12 MM

111 BLACK Art. No. 917959-000  
 112 RED Art. No. 917959-001  
 113 GREEN Art. No. 917959-002



#### PUSHBUTTON 16 MM

BLACK Art. No. 939115-000  
 BLUE Art. No. 939115-001  
 RED Art. No. 939115-002  
 GREEN Art. No. 939115-003  
 YELLOW Art. No. 939115-004  
 WHITE Art. No. 939115-005  
 ORANGE Art. No. 939115-006



#### PUSHBUTTON 12 MM

Art. No. 939124-000



#### PUSHBUTTON WITH LED, REMAINING

RED Art. No. 930894-000  
 YELLOW Art. No. 930894-001  
 GREEN Art. No. 930894-002



#### PUSHBUTTON WITH LED, MOMENTARY

RED Art. No. 933112-000  
 YELLOW Art. No. 933112-001  
 GREEN Art. No. 933112-002

### Joysticks



#### ÅKERSTRÖMS' STANDARD JOYSTICK

Available as stepless or with different numbers of steps and directions



#### JOYSTICK, STEPLESS

3-AXIS Art. No. 944608-000  
 2-AXIS Art. No. 944608-100



#### JOYSTICK, STEPLESS

2-AXIS + BUTTON Art. No. 944608-200  
 1-AXIS + BUTTON Art. No. 944608-300



#### JOYSTICK, DOUBLE OUT PUTS, 2 BUTTONS

Art. No. 945366-000



#### JOYSTICK, PADDLE

Art. No. 943411-000

### Toggle switches



1-0 MAINTAINED Art. No. 710734-000  
 1-0-1 NON-MAINTAINED Art. No. 918794-000  
 1-0-1 MAINTAINED Art. No. 918935-000  
 1-0-1 MAINTAINED + NON-MAINTAINED Art. No. 918938-000

### Toggle switches

(T-Rx Era 100)

1-0 LOCKING Art. no. 949973-000  
 1-0-1 LOCKING Art. no. 949973-001  
 1-0-1 LOCKING + NON-LOCKING Art. no. 949973-007  
 1-0-1 NON-LOCKING Art. no. 949973-006



### Safety toggle switches

1-0 MAINTAINED Art. No. 918936-000  
 1-0 NON-MAINTAINED Art. No. 921887-000  
 1-0-1 MAINTAINED Art. No. 918937-000  
 1-0-1 MAINTAINED + NON-MAINTAINED Art. No. 940855-000  
 1-0-1 NON-MAINTAINED Art. No. 941403-000

### Key switches



Key switch for T-Rx 300, T-Rx 500 Art. No. 901884-000



Key switch Art. No. 915022-000

### LEDs



RED Art. No. 946358-000  
 GREEN Art. No. 946358-001  
 YELLOW Art. No. 946358-002  
 BLUE Art. No. 946358-003  
 HIGH POWER Art. No. 946359-xx



When other products give up.  
Ours just keep on going.  
Day after day.  
In the real world.  
Your world.

# REMOTUS

## T-Rx — Receivers

The Remotus T-Rx receivers are available in three models. T-Rx 500 is a receiver controlling up to 24 on/off functions, T-Rx 1500 up to 8 analogue functions, PWM (0-3A) or analogue outputs (0-10V or 0-20 mA) and T-Rx 100 is a CANopen based receiver for control via existing PLCs. The receivers have a shock- and water resistant aluminum housing (IP67). They have double security outputs and transmitted radio messages are very secure. Double microprocessors monitor each other and each message is checked before it is accepted. Command errors don't occur and security is increased. Two-way communication as standard.

### REMOTUS T-Rx 100

**No. of outputs:**

RCSS: 2 outputs. 2 Amp source

**CANopen**

**Baud rate:** 50 kbits/s...1 Mbits/s (default 125 kbits/s)

**CANopen Node-ID:**

1..126 (default 32)

**CANopen Com-profile:** CiA DS 301 Version 4

**CANopen Dev-profil:** CiA 401

Generic I/O module

**LSS support:** Remote node-ID and baud rate

**CAN termination:** On/Off

**Connections:**

**External antenna:** 1xSMA (2xSMA option)

**Power supply and RCSS:**

M12 4-pin hane

**CAN:** M12 5-pin male

**Cable control:** M12 8-pin female

**Radio frequency:**

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

**Operating temperature:**

-25°C to +55°C

**Housing:**

Aluminum

**Protection class:**

IP67

**Size:**

152 x 141 x 36 mm

**Weight:**

0.65 kg

**Operating voltage:**

12 V DC, negative grounded system

**Current consumption:**

100 mA (without external load at 12 V)



### REMOTUS T-Rx 500

**No. of outputs:**

RCSS: 2 outputs, 3 Amp source

**Digital:** Maximum 24 outputs 3 Amp on/off source

**1 serial input:** RS422/RS485

**Connections:**

**External antenna:** 1xSMA

**Outputs, power supply:**

Screw terminals

**Radio frequency:**

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

**Security:**

Double processors, 2 "solid state" security outputs (RCSS)

**Operating temperature:**

-25°C to +55°C

**Housing:**

Aluminum

**Protection class:**

IP67

**Size:**

275 x 174 x 64 mm

**Weight:**

1.6 kg

**Operating voltage:**

12/24 V DC, negative grounded system

**Current consumption:**

100 mA (without external load at 12 V)





## REMOTUS T-Rx 1500

### No. of outputs:

**RCSS:** 2 outputs, 3 Amp source  
**Digital:** Maximum 24 outputs 3 Amp source. 8 are always outputs. 16 shares function with PWM outputs.  
**PWM:** Maximum 16 outputs 3 Amp source, 50-400 Hz, 12 bits resolution  
**External indication:** 1 output 0,5 A  
**Analogue:** 8 outputs 0-10V or 0-20mA, 12 bits resolution  
**10V ref:** 10V, 100 mA reference output to sensors, potentiometers etc.

### CANopen

**Baud rate:** 50 kbits/s...1 Mbits/s (default 125 kbits/s)  
**CANopen Node-ID:** 1..126 (default 32)  
**CANopen Com-profile:** CiA DS 301 Version 4  
**CANopen Dev-profil:** CiA 401 Generic I/O module  
**LSS support:** Remote node-ID and baud rate  
**CAN termination:** On/Off

### No. of inputs:

**Digital:** Maximum 16 inputs  
**Analogue:** 2 inputs 0-10V or 0-20mA, 10 bits resolution

### Connections:

**External antenna:** 1xSMA (2xSMA option)

### In-/Outputs, power supply:

AMP MCP 62-pole  
Cable control: M12 8-pin female

### Radio frequency:

433-434 MHz, 438-445 MHz, 863-870 MHz, 915-928 MHz, 2.4 GHz

### Security:

Double processors, 2 "solid state" security outputs (RCSS)

### Operating temperature:

-25°C to +55°C

### Housing:

Aluminum

### Protection class:

IP67

### Size:

218 x 174 x 64 mm

### Weight:

1.6 kg

### Operating voltage:

12/24 V DC,  
negative grounded system

### Current consumption:

100 mA (without external load at 12 V)



# REMOTUS

## Carrying devices and accessories

Our carrying devices provides a comfortable and ergonomically working position and reduces the body burden of long hours. We have several different carrying devices to choose from that easily can be adapted to each user. A custom belt is included with each transmitter. We also offer a wide range of accessories and spare parts such as batteries, chargers, storage cabinets, signs etc. Visit our webshop at [akerstroms.com](http://akerstroms.com) for more information, pictures and article numbers!



### Shoulder strap

**SHOULDER STRAP**  
Era 100, T-Rx 100  
Art. No. 944204-000

**SHOULDER STRAP**  
T-Rx 300/500  
Art. No. 944204-001



### Harness

**HARNES**  
Era 100, T-Rx 100,  
Art. No. 947108-000



### Belt holder

**BELT HOLDER KIT**  
T-Rx 12B/T-Rx 28J B  
Art. No. 934158-000



### Belt holder

**BELT HOLDER CLIP ON**  
Era 4/6/8B  
Art. No. 952147-000



### Protective bag

**PROTECTIVE BAG**  
T-Rx 12B  
Art. No. 951900-001



### Protective bag

**PROTECTIVE BAG**  
Era 4/6/8B,  
Art. No. 951900-000



### Vehicle bracket

**VEHICLE BRACKET**  
T-Rx 12B  
Art. No. 935408-001



### Vehicle bracket

**VEHICLE BRACKET**  
Era 4/6/8B  
Art. No. 952521-000



### Wall bracket

**WALL BRACKET**  
Era 4/6/8B  
Art. No. 952148-000

Visit our webshop for  
accessories and spareparts at  
[akerstroms.com](http://akerstroms.com)



### Vest

**VEST**  
Era 100, T-Tx 100,  
T-Rx 300/500  
Adjustable size  
Art. No. 951854-000



### Belt

**BELT**  
Era 100, T-Rx 100  
Adjustable size  
Art. No. 952704-000



### Belt

**BELT**  
T-Rx 300/500  
Adjustable size  
Art. No. 952705-000



### Belt

**BELT WITH RAIL**  
T-Rx 100  
700-1100 mm  
Art. No. 935537-000



### Belt

**BELT WITH FLIP-UP**  
T-Rx 12B/T-Rx 28J B  
Art. No. 935537-004



### Hook

**HOOK**  
T-Rx 300/500  
Art. No. 926708-000



### Hook

**HOOK**  
T-Rx 100  
Art. No. 925563-000



### FREQUENCYCLOUD

Åkerströms' cloud service FrequencyCloud is a piece of software that runs via the internet. FrequencyCloud manages your frequencies simply and effectively.

[www.frequencycloud.com](http://www.frequencycloud.com)



NAME: ÅKERSTRÖMS BJÖRBO AB.  
SPECIALITY: Robust radio remote control  
for industry and the mobile market  
FOUNDED: 1918



NAME: Åkerströms' production  
SPECIALITY: Production of robust  
radio remote control for industry and  
the mobile market



Åkerströms Björbo AB  
SE-785 45 Björbo, Sweden  
Phone +46 241 250 00  
sales@akerstroms.com  
akerstroms.com

